


■ 外形尺寸和印记 Outline Dimensions and Mark

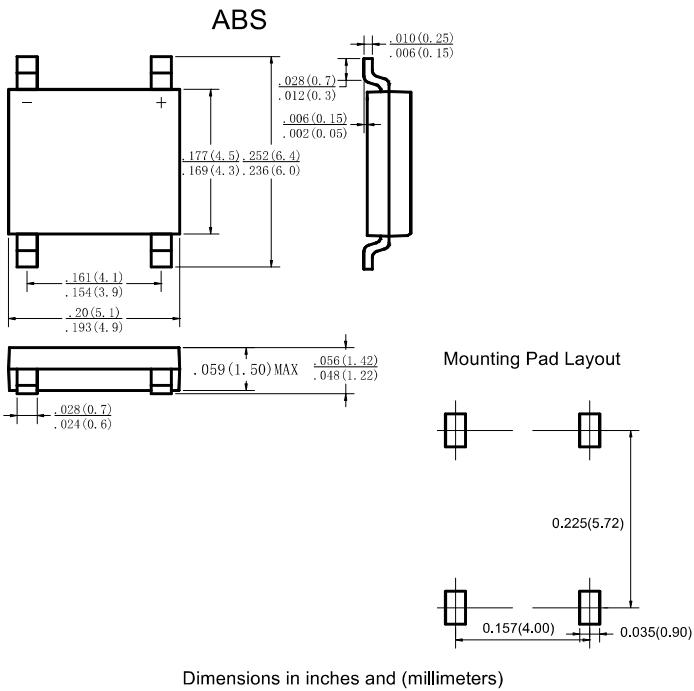

■ 特征 Features

- I_o 1A
- V_{RRM} 200V~1000V
- 玻璃钝化芯片
Glass passivated chip
- 耐正向浪涌电流能力高
High surge forward current capability

■ 用途 Applications

- 作一般电源单相桥式整流用
General purpose 1 phase Bridge rectifier applications

■ 极限值 (绝对最大额定值)

Limiting Values (Absolute Maximum Rating)

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	ABS				
				2	4	6	8	10
反向重复峰值电压 Repetitive Peak Reverse Voltage	V_{RRM}	V		200	400	600	800	1000
平均整流输出电流 Average Rectified Output Current	I_o	A	60Hz正弦波, 电阻负载, $T_a=25^\circ C$ 60Hz sine wave, R-load, $T_a=25^\circ C$				0.8	
正向(不重复)浪涌电流 Surge(Non-repetitive)Forward Current	I_{FSM}	A	60Hz正弦波, 一个周期, $T_j=25^\circ C$ 60Hz sine wave, 1 cycle, $T_j=25^\circ C$				30	
正向浪涌电流的平方对电流 浪涌持续时间的积分值 Current Squared Time	I^2t	A^2S	$1ms \leq t < 8.3ms$ $T_j=25^\circ C$, 单个二极管 $1ms \leq t < 8.3ms$ $T_j=25^\circ C$, Rating of per diode				3.7	
存储温度 Storage Temperature	T_{stg}	°C					-55 ~ +150	
结温 Junction Temperature	T_j	°C					-55 ~ +150	

■ 电特性 ($T_a=25^\circ C$ 除非另有规定)Electrical Characteristics ($T_a=25^\circ C$ Unless otherwise specified)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition	最大值 Max
正向峰值电压 Peak Forward Voltage	V_{FM}	V	$I_{FM}=0.4A$, 脉冲测试, 单个二极管的额定值 $I_{FM}=0.4A$, Pulse measurement, Rating of per diode	0.95
反向峰值电流 Peak Reverse Current	I_{RRM}	μA	$V_{RM}=V_{RRM}$, 脉冲测试, 单个二极管的额定值 $V_{RM}=V_{RRM}$, Pulse measurement, Rating of per diode	10
热阻 Thermal Resistance	$R_{\theta J-A}$	°C/W	结和环境之间, 安装在氧化铝基板上 Between junction and ambient, On alumina substrate	62.5
	$R_{\theta J-L}$		结和引线之间 Between junction and lead	25

■特性曲线(典型)

