


外形尺寸和印记 Outline Dimensions and Mark

DO-41

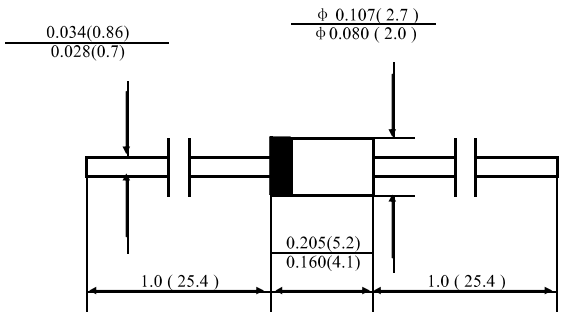

inch mm

特征 Features

- I_o 1.0A
- VRRM 150-200V
- 耐正向浪涌电流能力高
- High surge current capability

极限值（绝对最大额定值）

Limiting Values (Absolute Maximum Rating)

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	SR1150	SR1200
反向重复峰值电压 Repetitive Peak Reverse Voltage	V_{RRM}	V		150	200
正向平均电流 Average Forward Current	$I_{F(AV)}$	A	正弦半波 60Hz,电阻负载, $T_a=50^{\circ}C$ 60Hz Half-sine wave, Resistance load, $T_a=50^{\circ}C$	1.0	
正向（不重复）浪涌电流 Surge(Non-repetitive)Forward Current	I_{FSM}	A	正弦半波 60Hz, 一个周期, $T_a=25^{\circ}C$ 60Hz Half-sine wave, 1 cycle, $T_a=25^{\circ}C$	30	
结温 Junction Temperature	T_J	$^{\circ}C$		-55~+125	
储存温度 Storage Temperature	T_{STG}	$^{\circ}C$		-55 ~ +150	

电特性 ($T_a=25^{\circ}C$ 除非另有规定)

Electrical Characteristics ($T_a=25^{\circ}C$ Unless otherwise specified)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition		SR1150	SR1200
正向峰值电压 Peak Forward Voltage	V_{FM}	V	$I_{FM}=1.0A$		0.90	
反向漏电流 Peak Reverse Current	I_{R1}	mA	$V_{RM}=V_{RRM}$	$T_a=25^{\circ}C$	0.1	
	I_{R2}			$T_a=100^{\circ}C$	10	
热阻(典型) Thermal Resistance(Typical)	$R_{\theta J-A}$	$^{\circ}C/W$	结和环境之间 Between junction and ambient		25	
	$R_{\theta J-L}$		结和引线之间 Between junction and lead		8	

■特性曲线（典型）

